


Thru Axle Fit Guide

This product is NOT compatible with capped drop outs.

This guide is intended to help determine which Thru Axle you will need for hitching a Burley trailer to your bike.


STEP 1

Print this sheet at 100% on 8.5" X 11" paper.

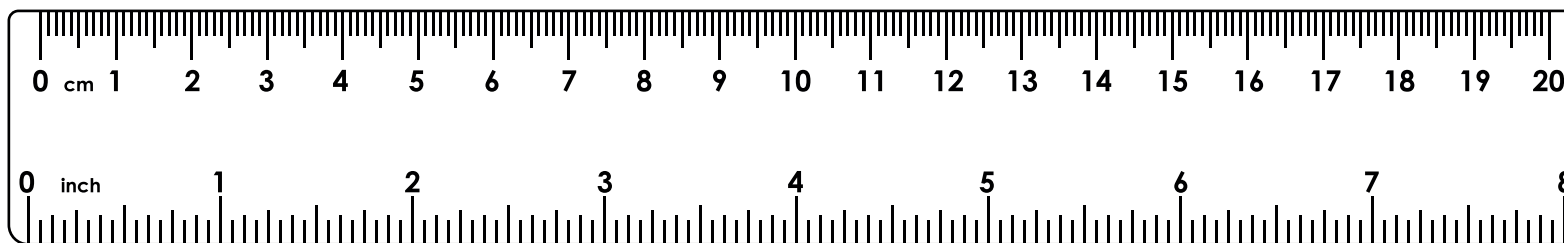


STEP 2


Confirm the thread pitch of your current axle by placing it over the illustrations below to find a match. The thread pitch is the distance from the tip of one thread to the tip of the next.



1mm




1.5mm



1.75mm

STEP 3

Measure the length of your current thru axle using this illustration. Align your axle at 0mm, measure from the base of the axle head to the tip of the threads.

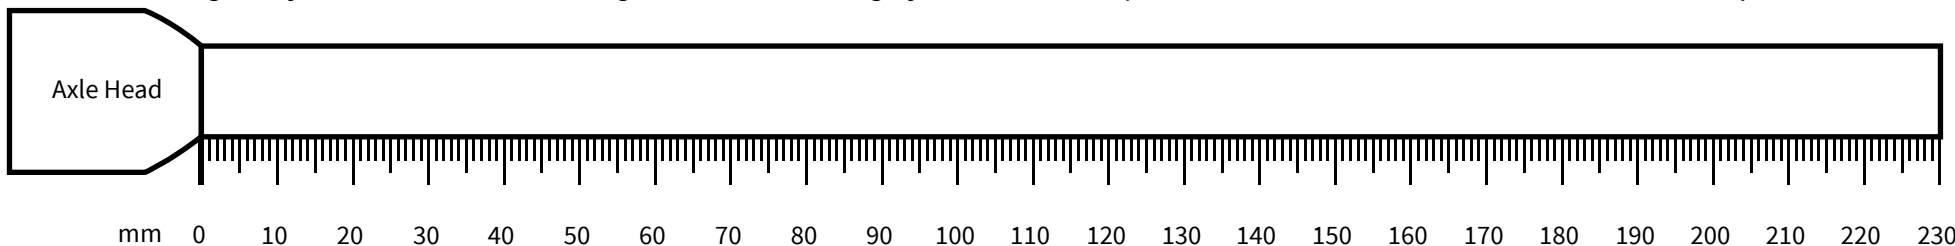

STEP 4

Use the thread pitch and axle length to determine which axle you need.

Thread Pitch (TP)	Frame Measured Axle Length	Compatible Thru Axle	SKU
1.0	~158-174mm	12 X 1.0, 158-174mm actual length	960240
1.0	~167-183mm	12 X 1.0, 167-183mm actual length	960241
1.5	~159-165mm	12 X 1.5, 159-165mm actual length	960242
1.5	~172-178mm	12 X 1.5, 172-178mm actual length	960243
1.5	~229mm	12 X 1.5, 229mm actual length	960244
1.75	~174-180mm	12 X 1.75, 174-180mm actual length	960245
1.75	~229mm	12 X 1.75, 229mm actual length	960246

NOTE: If your axle length is not shown for the thread pitch you have, we do not have a compatible thru axle for you at this time.

BURLEY.COM

